



# Florida Department of Environmental Protection

Marjory Stoneman Douglas Building  
3900 Commonwealth Boulevard  
Tallahassee, Florida 32399-3000

Rick Scott  
Governor

Carlos Lopez-Cantera  
Lt. Governor

Noah Valenstein  
Secretary

July 3, 2018

## NOTICE TO APPLICANTS ADDENDUM NO. One (1)

### Grayton Beach State Park Campground Reinvestment DEP Bid NO. BDC33-17/18

TO BIDDERS AND PLAN HOLDERS ON THE ABOVE REFERENCED PROJECT: PLEASE NOTE CONTENTS HEREIN AND INCLUDE WITH YOUR BID SUBMISSION.

## NOTICE

---

It will be required that this addendum be signed in acknowledgment of receipt and that it be included with your Bid when same is submitted to Adam Browne, Government Operations Consultant II, Bureau of Design and Construction, 3800 Commonwealth Blvd. MS520, Tallahassee, Florida 32399-3000. Failure to do so may be grounds for rejection of the Bid.

---

Signature of Contractor and Date

The Following statements supersede & supplement the corresponding items in the specifications & drawings:

**The attached documents are hereby incorporated into the bid documents:**

- BASE BID UTILITY PAD DETAIL.
- Pre-Bid Meeting Sign In Sheet


1. **Question:** On page C100 in the middle of the page it says for the existing pedestals to be removed, saved and relocated which that number should be a total of 37.

**Response:** Correct, Contractor shall plan to re-install the existing pedestals from the 37 existing campsites.

2. **Question:** On page E100 bottom right, note 1 says to deliver pedestals to owner, does not say to re-install existing pedestals. Also, I do not see on any of the electrical sheets to re-install existing pedestals. I know site 38 and 39 will be new, but does the other 37 existing sites get new pedestals or do we re- install the one that are there now?  
**Response:** Contractor shall plan to re-install the existing pedestals from the 37 existing campsites.
3. **Question:** On page C502 mentions a wet well and note 9 says for the enclosures to be 3R or better except for the control panel and it is to be 4X. I see no reference on the electrical sheets or in the panel schedules for any electrical to power up a wet well. Please advise if there is going to be a wet well and what the electrical requirements will be.  
**Response:** Notes on C502 are “General Notes for DEP”. Per plans, this project will NOT have a Wet Well.
4. **Question:** On page E510 it calls for panel A and B and the ct can to be 316 stainless steel. But it does not say what the 320A meter can on riser A and the ct meter can on riser B to be made of. Do they want standard 3R or stainless-steel enclosures?  
**Response:** Stainless Steel should be used for the Meter Cans as well.
5. **Question:** Will existing gravel be removed and replaced with new gravel per detail?  
**Response:** Gravel road to be returned to the original condition.
6. **Question:** Will all campsites have 6x6 curb around the perimeter of camp site?  
**Response:** See attached BASE BID UTILITY PAD DETAIL.
7. **Question:** Will there be available area for laydown?  
**Response:** A staging or laydown area must be coordinated with the Park Manager and the BDC Construction Project Manager.
8. **Question:** Will Campground be operational while work is being performed?  
**Response:** The park will be open, but the campground loop will be closed starting September 2018.
9. **Question:** Are there any work hour limitations?  
**Response:** Work hours will not start before 8 am and will stop at sundown. Weekend work is allowed.
10. **Question:** Is existing sewer manhole remaining or being replaced?  
**Response:** The existing manhole will remain.

6"x 6" PT WOOD BOLLARD  
ON ENTRY SIDE. INSTALL  
SECOND BOLLARD ONLY AT  
PULL THROUGH SITES

WATER SUPPLY STAND  
PIPE W/ HOSE BIBB -  
SEE HOSE BIBB DETAIL  
SECTION AA

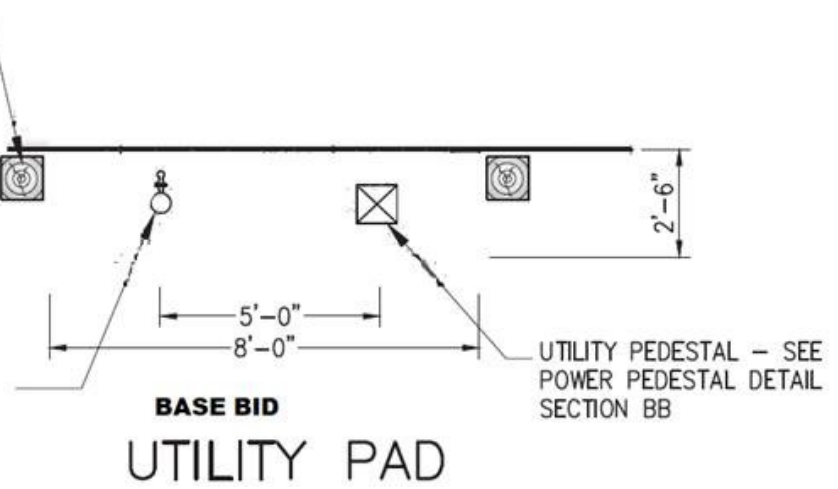

UTILITY PEDESTAL - SEE  
POWER PEDESTAL DETAIL  
SECTION BB

In all other respects, the contract documents of which this is an Addendum, and attachments relative thereto, shall remain in full force and effect.